

A3DM312RV-D

Analog HD Dome for indoor/outdoor with IR KEY FEATURES


- AHD/CVI/TVI/CVBS multi-standard video output
- Resolution 1080P(HD) / 960H(CVBS)
- True Day/Night with ICR
- Integrated IR LEDs reaching up to 20m IR distance
- 2.8 -12mm Vari-Focal IR Corrected Lens
- OSD with UTC control
- BLC / HLC / 2D-3D DNR / Digital WDR
- Vandal-proof and weather-proof (IP66)




TECHNICAL SPECIFICATIONS

Video Output Mode	4 in 1 (AHD / CVI / TVI / CVBS)
Camera	
Image Sensor	1/2.9" SONY 2.4MP CMOS (IMX323)
DSP	NVP2441H
Image Resolution	1080P / 960H
Effective Pixels	1920*1080
TV System	PAL/NTSC
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s
S/N Ratio	≥50dB
Scanning System	Progressive Scan
Lens	
Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Manual
Pixels	3M Pixels
Motor Iris Support	NO
Night Vision	
Infrared LED	14μ x 18PCS
Infrared Distance	20M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Motor Control
Camera Features	
Day/Night	YES
OSD Menu Language	YES
White Balance	Motor / MANUAL
Gain Control	Motor
Noise Reduction	3DNR
Picture Adjustment	YES
WDR	YES
OSD Support	YES
UTC	YES
General	
Housing	IP66
Bracket	Option, SYB-CK-AB181*
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 500mA
Dimension	∅ 139 x 122(H) mm
Weight	800g

MECHANICAL DRAWINGS

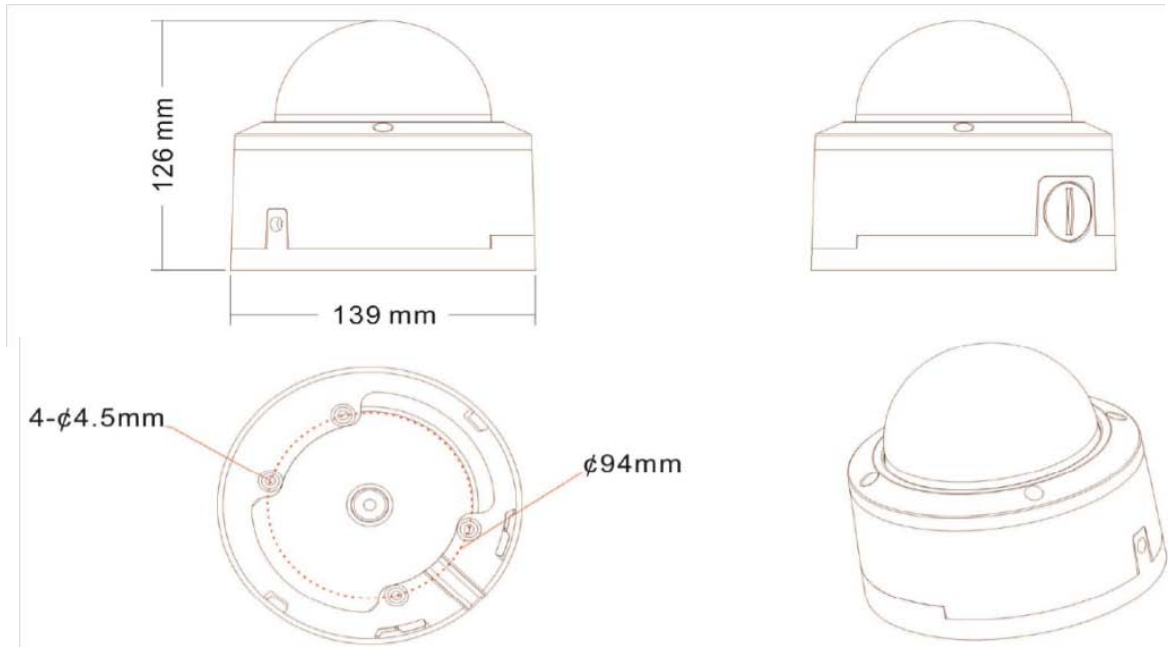

* OPTION BRACKET SYB-CK-AB181

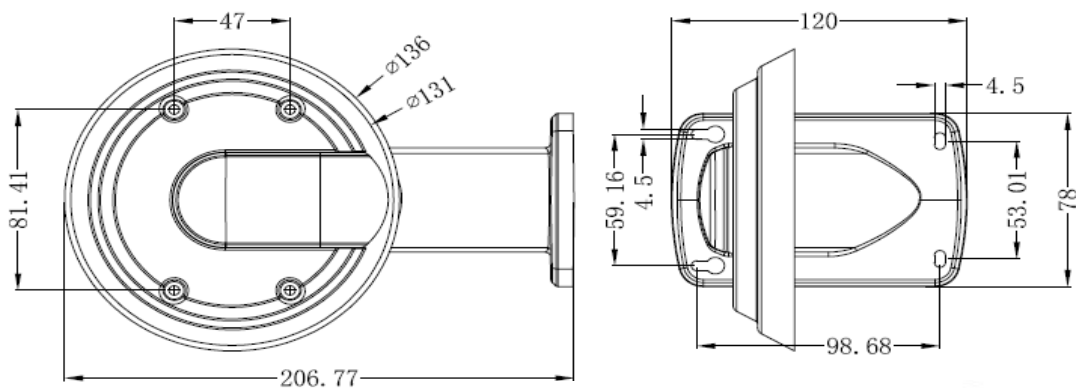

Head Office and Plant
Via della Scienza 50
41122 Modena—Italy
Tel.: +39 059 289811
Fax: +39 059 289860
www.techboard.it



Security Division
Area Science Park
Trieste - Italy
Tel. +39 059 289899
Fax + 39 059 289860
www.syac-tb.com